

# Electromagnetic Effect

---




UNIVERSITY  
CENTRE

# Refresher on magnetic fields


---

- Magnetic Fields always follow these 5 rules (properties):
  - Opposites attract
  - Like Repel
  - Flow North  $\rightarrow$  South
  - Field lines never cross
  - Field lines never break

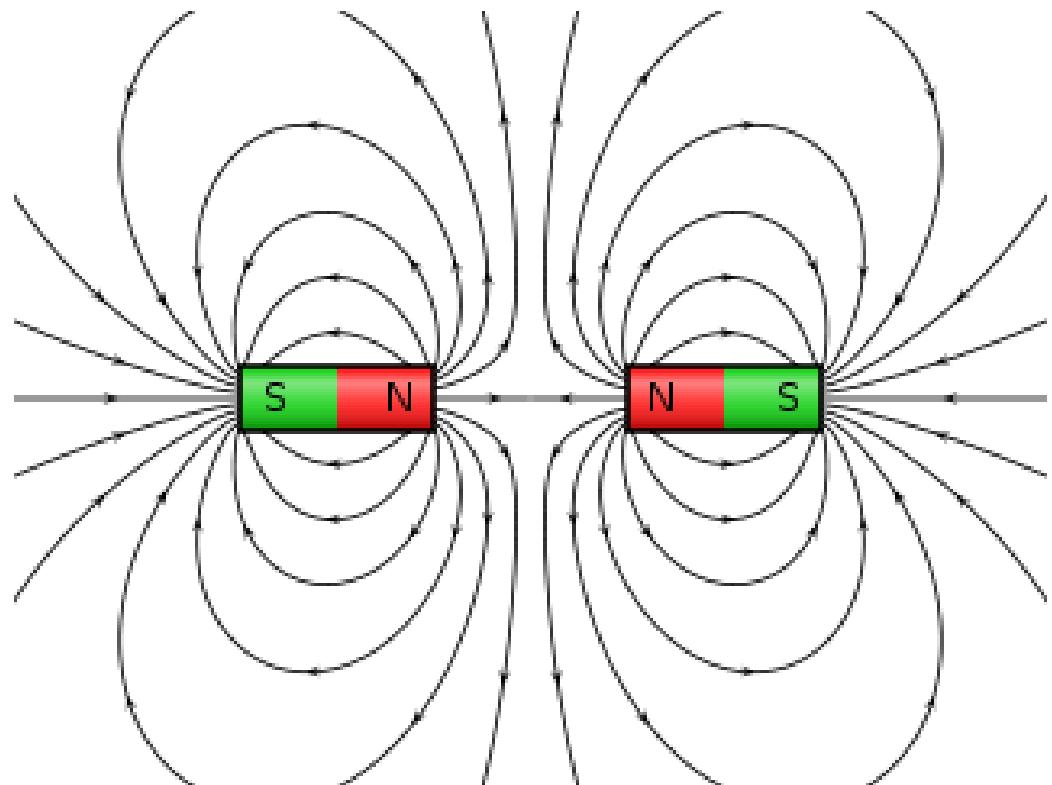

# Electromagnetic Effects

- The electromagnetic effect is the term that encompasses all interactions between magnets and electronics
- A wire carrying current will generate a magnetic field, this is **electromagnetism**
- A wire moving through a magnetic field will have a current generated in it, this is **electromagnetic induction**

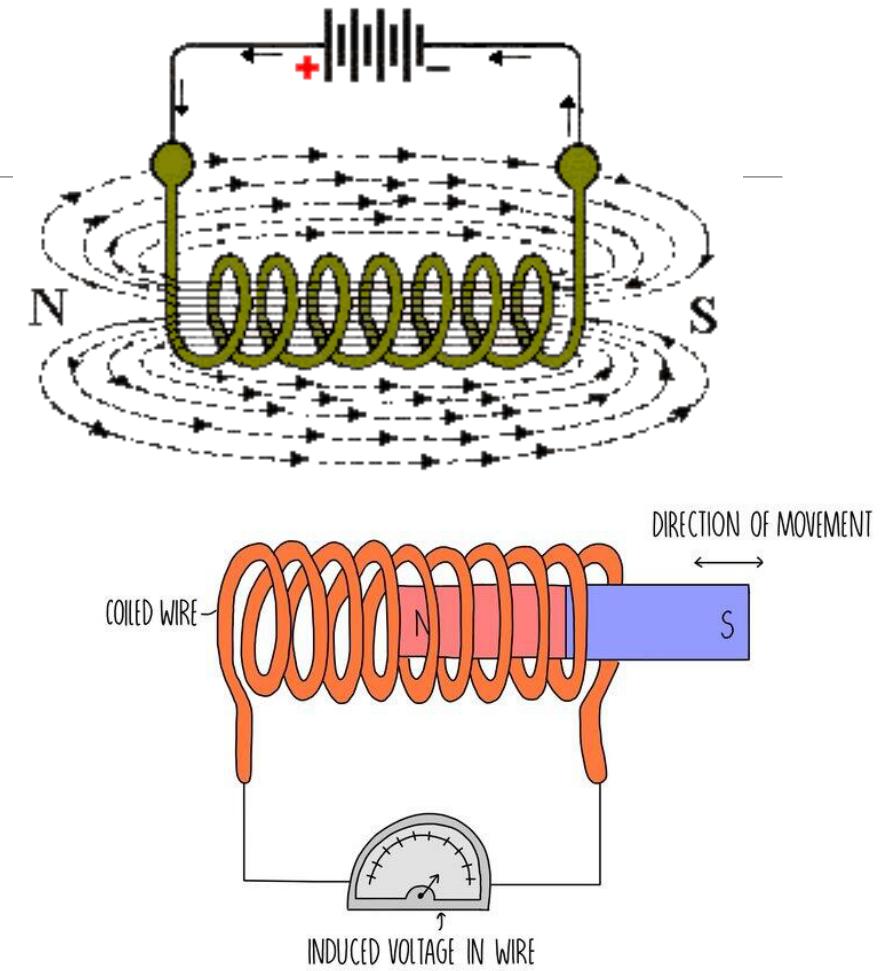

# The 3 laws

---

**All electromagnetic effects are governed by 3 rules:**

- **Faradays law:**
  - The magnitude of the induced emf is directly proportional to the rate of change in magnetic flux. (a greater change in magnetic flux = a greater change in current)
- **Lenz's law:**
  - The induced emf acts in such a direction to produce effects that oppose the change causing it. (the current acts in the opposite direction to the movement of the magnet)
- **Ampere-Maxwell law:**
  - Magnetic fields are created by electric currents and changing electric fields, meaning that both steady and changing electric currents can produce magnetic fields.

# Electromagnetic Induction

---

- Electromagnetic induction is the effect where a magnetic field generates a current flow in a circuit.
- There are two main types of electromagnetic induction
  - Statically Induced EMF where the conductor stays still and a magnetic field moves through it, these will typically be in a loop setup
  - Motivational Induced EMF where the conductor moves through the magnetic field.

# Statically Induced EMF


---

- Statically induced EMF follows Faraday's law as well as Lenz's law which combine into:

$$\mathcal{E} = -N \frac{\Delta \Phi_B}{\Delta t}$$

Where:

- $\mathcal{E}$  = induced voltage (emf)
- $\Phi_B$  = magnetic flux
- $t$  = time
- $N$  = number of loops
- - = Lenz's component

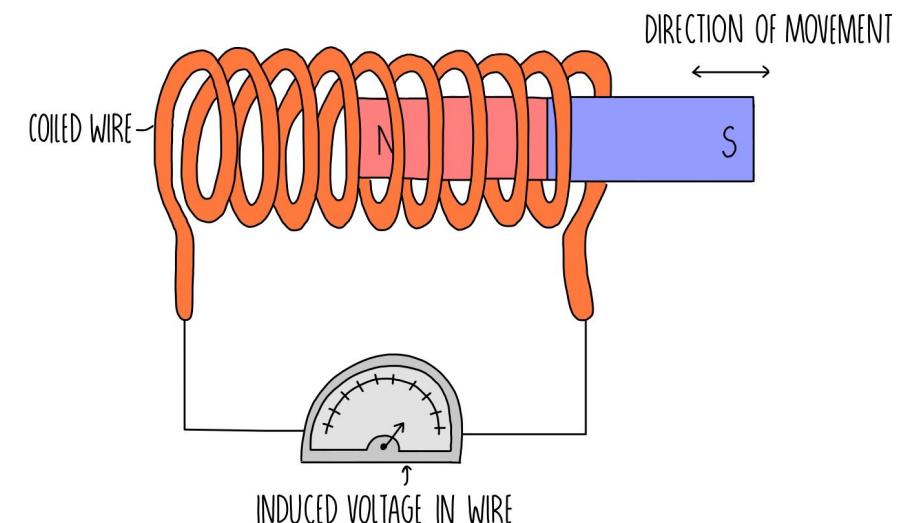

# Motivational Induced EMF


---

- Motivational Induced EMF also follows faraday's law having the equation:

$$\mathcal{E} = Blv$$

Where:


- $\mathcal{E}$  = induced voltage (emf)
- $B$  = Magnetic field
- $l$  = Length of conductor
- $v$  = velocity of the conductor

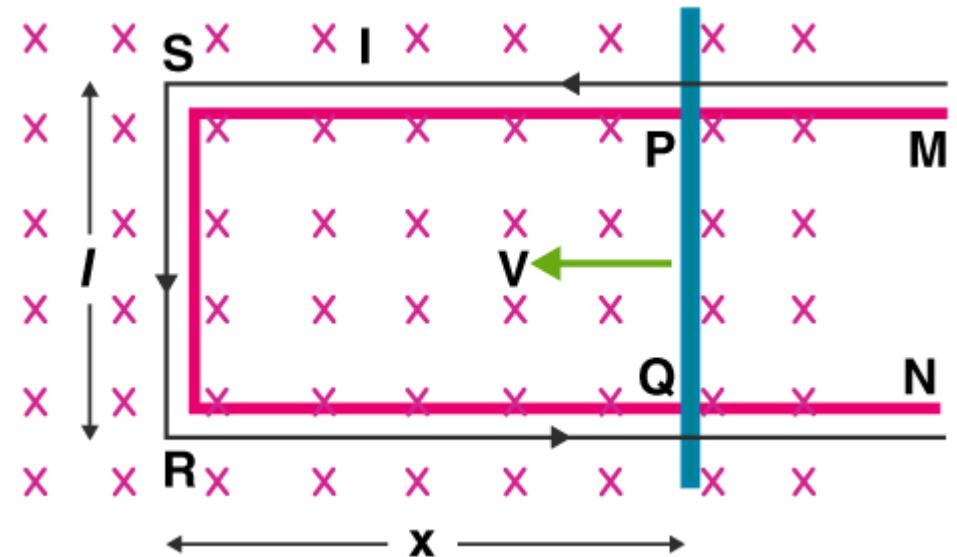

# Motivational Induced EMF

---

- For motivational induced current we know the direction of the current based on the right-hand rule
- You line up your fingers with the following:
  - Thumb = Thrust (velocity/motion)
  - First finger = Magnetic Field
  - Second finger = Current

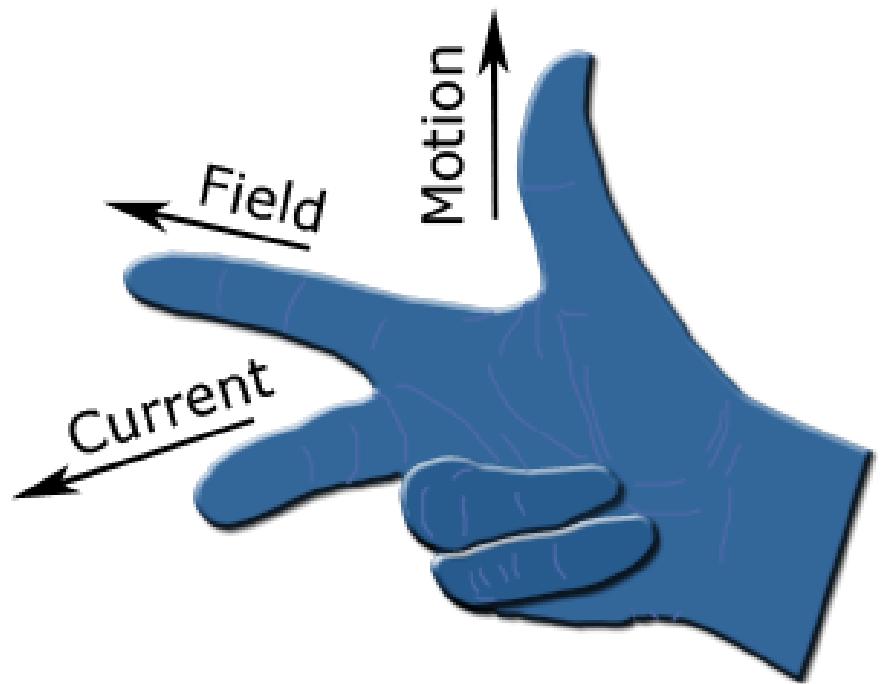

# Your turn


---

- **Have a go at these questions deciding if they are static or motivational and then work out the answer**

- 1) A coil with 250 turns is placed in a magnetic field. The magnetic flux through each turn changes from 0.02 Wb to 0.005 Wb in 0.1 seconds. Find the induced EMF in the coil.
- 2) A 0.5 m long conductor moves at 10 m/s perpendicular to a 0.2 T magnetic field. Calculate the induced EMF across the conductor.
- 3) A coil with 400 turns experiences a change in magnetic flux from 0.03 Wb to 0.01 Wb in 0.2 seconds. Find the induced EMF in the coil.
- 4) A 0.6 m long conductor moves at 5 m/s perpendicular to a 0.15 T magnetic field. Determine the induced EMF across the conductor.


# Other laws around EMF

- Self-Induced EMF (Back EMF):
  - Occurs when a coil opposes the change in current flowing through it.
- Mutually Induced EMF:
  - Induced in a secondary coil due to the changing current in a nearby primary coil.

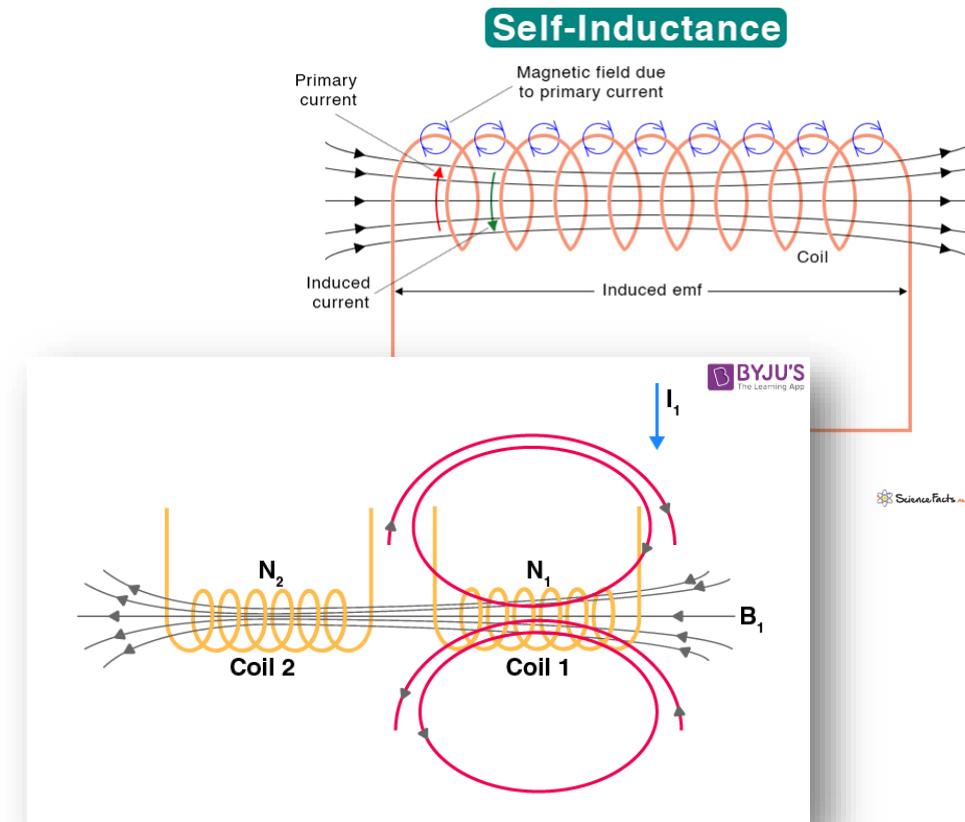

# Self Induced EMF

- Occurs when the change in current in a coil induces a voltage (EMF) in the same coil
- Follows the equation
  - $\mathcal{E}_{self} = -L \frac{\Delta I}{\Delta t}$
- Where:
  - $\mathcal{E}_{self}$  = induced voltage (emf)
  - $L$  = inductance of the coil
  - $\Delta I$  = change in current
  - $\Delta t$  = change in time
  - - = Lenz's component

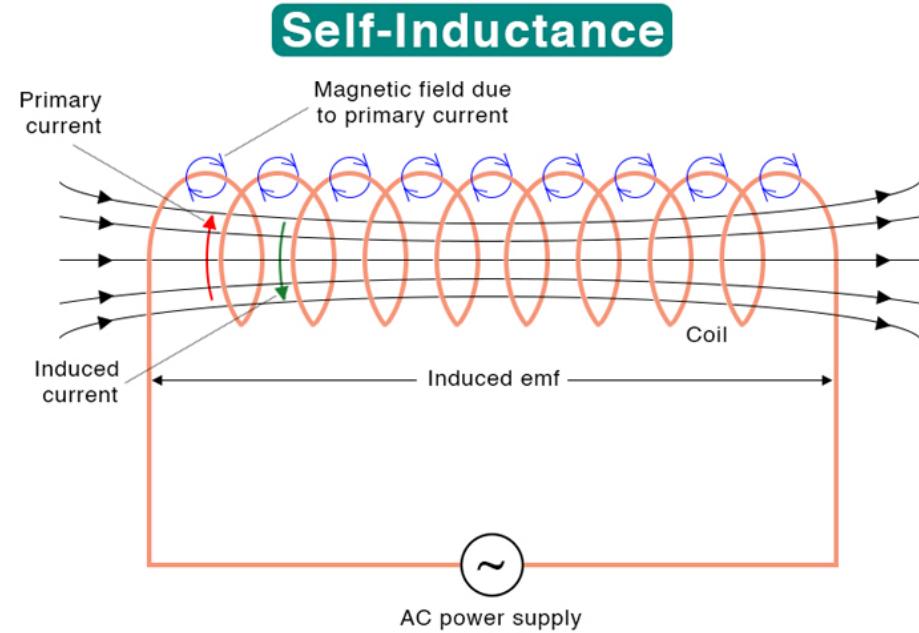

# Mutually Induced EMF


- Mutually induced EMF occurs when a changing current in one coil induces a voltage (EMF) in a nearby coil.

- It has the equation:

$$\mathcal{E}_{\text{mutual}} = -M \frac{\Delta I}{\Delta t}$$

- Where:

- $\mathcal{E}_{\text{mutual}}$  = induced voltage (emf)
- $M$  = mutual inductance of the two coils
- $\Delta I$  = change in current
- $\Delta t$  = change in time
- - = Lenz's component

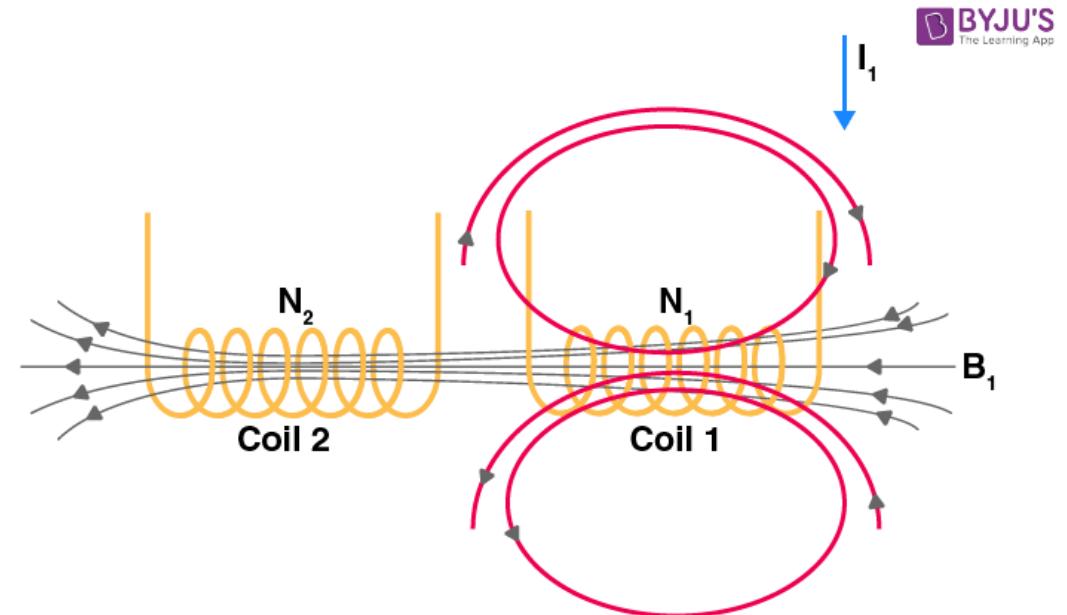

# Your turn

---



- **Have a go at these questions:**

- 1) A coil with an inductance of 0.3 H carries a current that changes at a rate of 5 A/s. Find the self-induced EMF in the coil.
- 2) Two coils have a mutual inductance of  $M = 2H$ . If the current in the first coil changes at a rate of 5A/s, what is the mutually induced EMF in the second coil.
- 3) Two coils are placed close to each other, and the mutual inductance between them is 1.5H, if the current in the first coil is changing at a rate of 0.8A/s, calculate the induced EMF in the second coil.
- 4) An inductor produces a self-induced EMF of 0.2v when the current through it changes at a rate of 4A/s. What is the inductance of the coil?

# Electromagnetism

---


- We know that current going through a wire makes a magnetic field
- However, if we make the wire into a loop it interacts with itself forming a different electric field

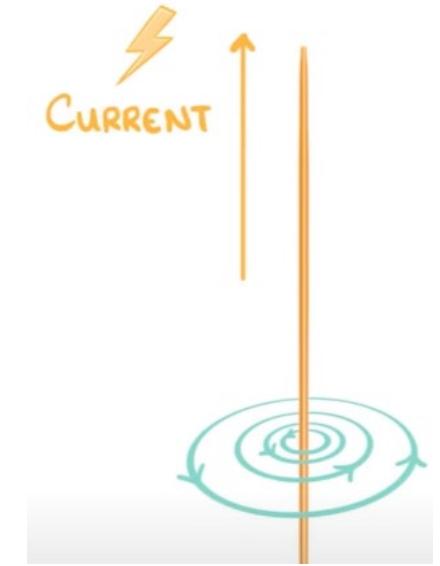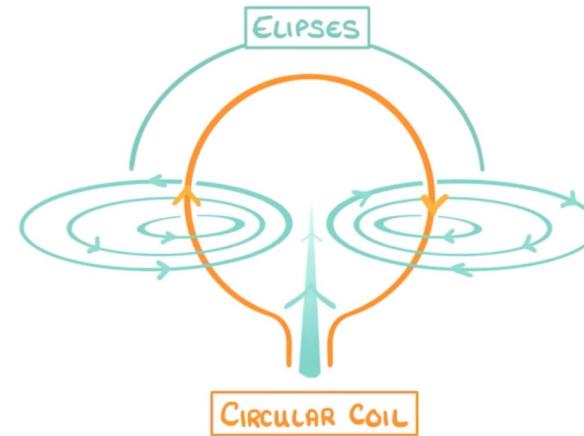

# Electromagnetism

---


- We can combine multiple loops to make a solenoid (electromagnet)
- The field inside of the solenoid is strong and uniform
- The field outside the solenoid is like that of a bar magnet

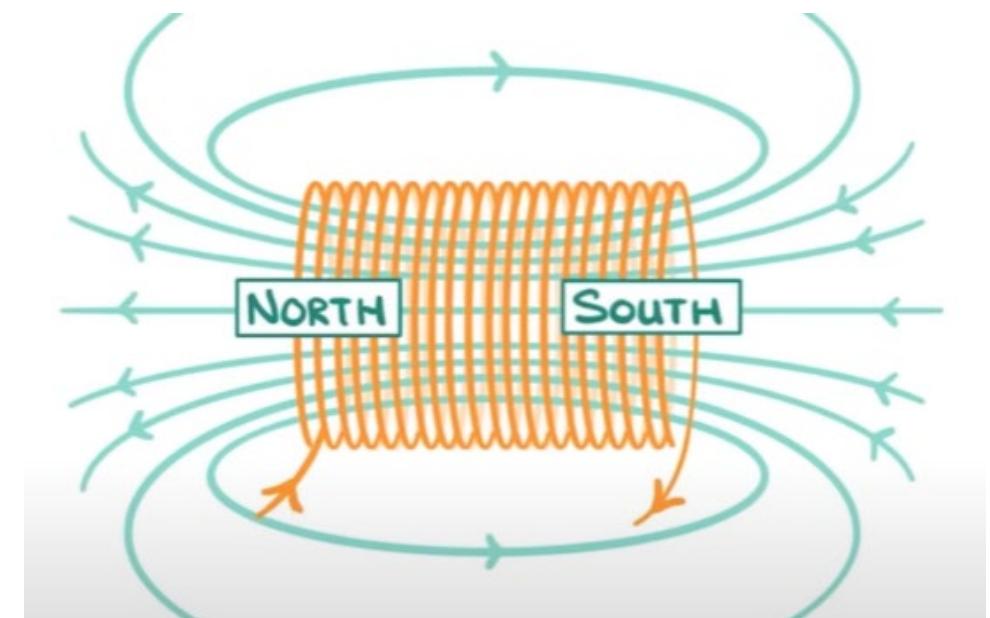

# Electromagnetism

---

- We can find out what direction the field is flowing using the right-hand curl rule
- The thumb will point towards the north pole, or the direction the field flows through the solenoid

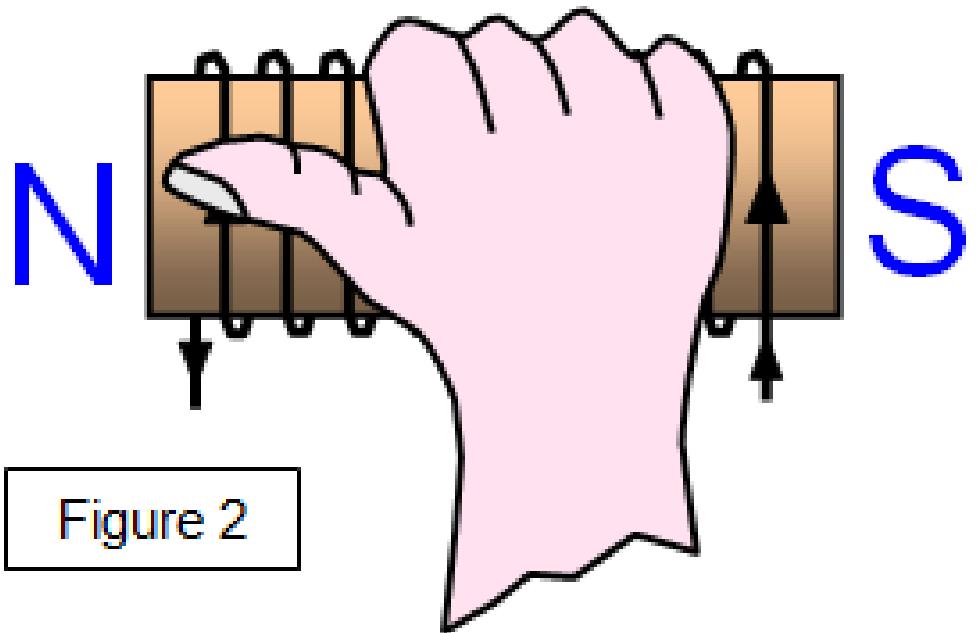

# Ampere + Maxwell's Law

---

- The strength of the magnetic field can be worked out using the ampere-maxwell equation:

$$\int_c B * \Delta l = \mu_0 \left( I_{enc} * + \mathcal{E}_0 \frac{\Delta \Phi_E}{\Delta t} \right)$$

- Where:
  - $B$  = the magnetic field
  - $\Delta l$  = the infinitesimal vector along the closed loop  $c$
  - $I_{enc}$  is the enclosed current within the loop
  - $\frac{\Delta \Phi_E}{\Delta t}$  is the rate of change of electric flux through the loop
  - $\mu_0$  is the permeability of free space ( $1.25663706 * 10^{-6}$ )
  - $\mathcal{E}_0$  is the permittivity of free space ( $8.85418782 * 10^{-12}$ )